

# PPC RTP580ie Retransfer Printer



## HIGHEST PERFORMANCE, FOR PERSONALIZATION OF SMART CARDS AND SECURE ID CARDS


- New security features: Dye-sublimation UV ink ribbon, IPSEC for encrypted data transfer through network, and Security erase of black data on used supplies
- Double-sided printing on a variety of card materials (PVC, Romark, ABS, PET, Polycarbonate, etc.)
- Rugged, industrial design with compact shape for heavy-duty use
- Network ready with built-in Ethernet port and IPSEC for encrypted data transfer
- Over-the-edge printing with EIP Enhanced Image Processing for great-looking cards with crisp, clear colours and flawless continuous tones
- Detachable card drawer and coloured cartridge system for convenient and simple front-loading supplies and cards
- Heavy-duty Retransfer Film for long-lasting durable cards
- Ideal for printing and inline encoding of smart cards by using the Advanced Chip Encoding Framework
- Optional single and double-sided lamination for more durability and security

The double sided PPC RTP580ie Retransfer Printer offers high quality and highly durable print results. It almost achieves offset print quality without a blemish even on the challenging uneven surfaces of smart cards and name badges. For maximum flexibility in a professional environment this innovative printer comes prepared for various encoding and lamination options.

The RTP580ie prints on a variety of card materials including long-lasting, durable non-PVC cards such as ABS, PET, Romark and Polycarbonate. The spacious card drawer stores up to 300 blank cards to secure an interruption-free workflow. The user-friendly front-loading system with replaceable cartridges for the colour ribbon and Retransfer film makes changing of supplies fast and simple.

For further demands on card functionality, optional magnetic stripe and smart card encoding is possible. Extend the life time and security of your cards by joining the printer with the EDIsecure ILU or OLM for single and double sided inline lamination.

New security features such as dye-sublimation UV ink ribbon for invisible security printing, IPSEC for encrypted data transfer through networks, and Security Erase of black data on used supplies help to secure the environment and cards from counterfeiting and to avoid misuse of personal information.

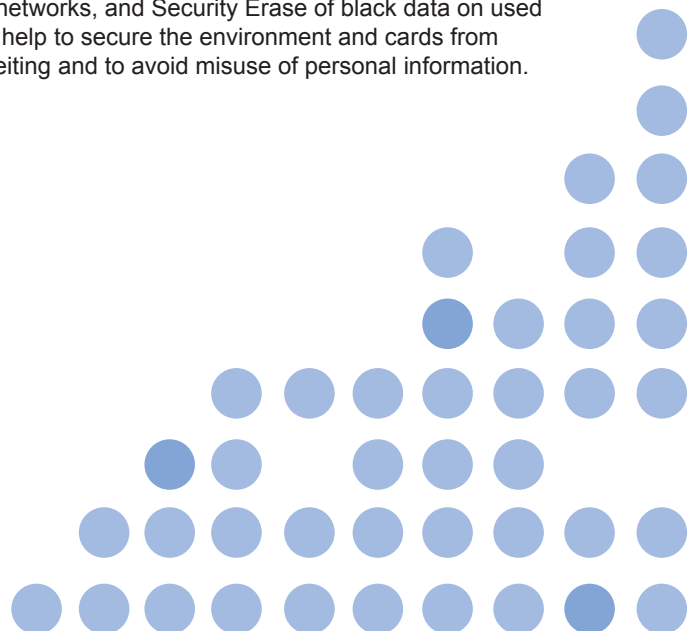



#### FEATURES:

- EIP Enhanced Image Processing for utmost quality
- Printer Look-Up Tables and pre-selection of 5 different card type profiles
- Automatic ribbon detection and low ribbon warning
- Auto cleaning notification
- Admin Center and Media Status Monitor to manage and handle printer settings from PC
- Built-in operating panel with LCD for convenient set-up and operation
- Printhead has no contact with card, minimizing risk of damage
- Removable cleaning roller unit for long-term use and reliable, steady card cleaning
- Field upgradeable encoder options
- Inline operation of printing, encoding and lamination reduces total personalization time
- Intuitive, in-house developed printer driver for utmost user convenience and productivity
- USB 2.0 and Ethernet ports for easy connection with PC or network
- IPSEC security feature for encrypted data transfer through network
- Field upgradeable to higher versions

#### SUPPLIES:

- RTP580ie Series Printers require the use of RTP Ribbons for full colour printing
- PPC 4 Panel Color Ribbon (YMCK): 1,000 cards/ribbon
- PPC 5 Panel Color Ribbon (YMCKK): 750 cards/ribbon
- PPC 5 Panel Peel-Off Ribbon (YMCK-PO): 750 cards/ribbon
- PPC 5 Panel UV Ribbon (YMCK-UV): 750 cards/ribbon
- PPC Retransfer Film: 1,000 cards/film

#### OPTIONS:

- Magnetic stripe encoding (HiCo and LoCo)
- Contact chip encoding
- Contactless chip encoding (Mifare, DESFire, HID iCLASS, Legic, etc.)
- A variety of chip encoder plug-ins for Advanced CEF
- Prepared for LaserCard encoding (incl. OptiChip)
- Inline lamination (single-sided, with ILU or OLM)

#### SPECIFICATIONS OF PPC RTP580ie

Print Method	Dye sublimation retransfer
Print Mode	Single- and double-sided over-the-edge retransfer printing (full bleed)
Print Speed	Up to 120 cards per hour (single-sided)
Print Resolution	300 dpi
Printhead	Lifetime warranty (using PPC materials)
Card Types	PVC, Composite PVC, ABS, PET, and Polycarbonate Cards of ISO ID-1/CR-80 size, 85.60 x 53.98 mm
Card Thickness	0.25 – 2.0 mm w/o encoder 0.25 – 1.4 mm with encoder
Input Hopper Capacity	300 cards (0.76 mm)
Output Hopper Capacity	100 cards (0.76 mm)
Interface	USB 2.0 and Ethernet
Operating System Support	MS Windows® 2000, XP, and VISTA
Printer Dimensions (WxDxH)	343 x 347 x 381 mm
Weight	22 kg
Power Supply	100/120 V and 220/240 V, 50/60Hz FCC, CE, UL, GOST, and CCC approved
Operating Environment	15°C to 30°C, 35% to 70% non-condensing humidity

Australia's Leading Card Printer Distributor



QUEENSLAND  
Unit 4, 106 Fison Ave  
Eagle Farm Qld 4007  
Tel: (07) 3868 7300  
Fax: (07) 3868 7350

NEW SOUTH WALES  
Unit 51, 6 Herbert St  
St Leonards NSW 2065  
Tel: (02) 9436 4766  
Fax: (02) 9436 4605

VICTORIA  
Suite 421, 1 Queens Rd  
St Kilda Rd Towers  
Melbourne Vic 3004  
Tel: (03) 9863 9744  
Fax: (03) 9863 9745

Internet: [www.ppc.com.au](http://www.ppc.com.au)

Email: [sales@ppc.com.au](mailto:sales@ppc.com.au)

Practical Peripherals Corporation Pty Ltd - ABN: 51 433 835 994